

Date: _____

Type: _____

Fixture: _____

Project: _____

Approved: _____

BASELINE



BASELINE is a low profile linear floodlight with 6°, 10°, 25°, 40°, 120°, 10° x 40°, 30° x 60° and 21° x 56° Asymmetric distributions. **BASELINE** comes in 1', 2', 3' and 4' nominal lengths and 3000K or 4000K color temperatures. The extruded anodized aluminum body with die cast end caps is sealed for IP66 rating and includes an adjustable standard mount bracket. Comes standard with 6' lead cord for connecting directly to power source.

SPECIFICATION



color temperature		2700K	3000K	3500K	4000K
output	beam spread	6° super spot, 10° spot, 25° narrow flood, 40° flood, 120° wide, 10°x 40° ellipse, 30°x 60° ellipse, 21°x 56° asymmetric			
	lumens per foot		570	602	750
	LEDs	6 per foot			
	driver efficiency	92%			
	lifetime	> 60,000 hours / L70 or better			
electrical	input voltage	20-24VDC constant voltage (fixtures do not daisy-chain)			
	power consumption	12.5W per foot			
physical	dimensions	A x 2" x 2.7"			
	weight	2' = 2.7 lbs. per foot / 4' = 2.2 lbs. per foot			
	housing	extruded and die cast aluminum			
	lens	tempered glass			
	mounting	includes standard adjustable bracket, available cantilever, pendant or cable line mount			
	operating temperature	-20°C to 50°C			
	junction temperature	75°C @ T ^a 25°C			
control	interface	0-10V Dimming			
	power supply	remote 24V DC			
certification and safety	certification	ETL / cETL			
	environment	dry, damp, wet location / IP 66			
	warranty	5-Year limited warranty (refer to website for details)			

PART NUMBERS

BL	MODEL	LENGTH	CCT	OPTICS	OPTIONS
BL	BASELINE	1 317.5 mm (12.5 in)	27K 2700K	6 6° Super Spot	D 0-10V Dimming
		2 635 mm (25 in)	3K 3000K	10 10° Spot	BL Black Louvre
		3 952.5 mm (37.5 in)	35K 3500K	25 25° Narrow Flood	ADL Added Cable Length
		4 1270 mm (50 in)	4K 4000K	40 40° Flood	CL Cantilever 8"
				120 120°	C Cable Line 36"
				1040 10°x 40° Ellipse	P Pendant 18"
				3060 30°x 60° Ellipse	SMB Surface Mount Bracket
				2156 21°x 56° Asym.	


Due to continuous development and improvements, specifications are subject to change without notice. Solid State Luminaires reserves the right to change lab test details or specifications without notice. Product use certifies agreement to Solid State Luminaires terms and conditions.

Dimensions

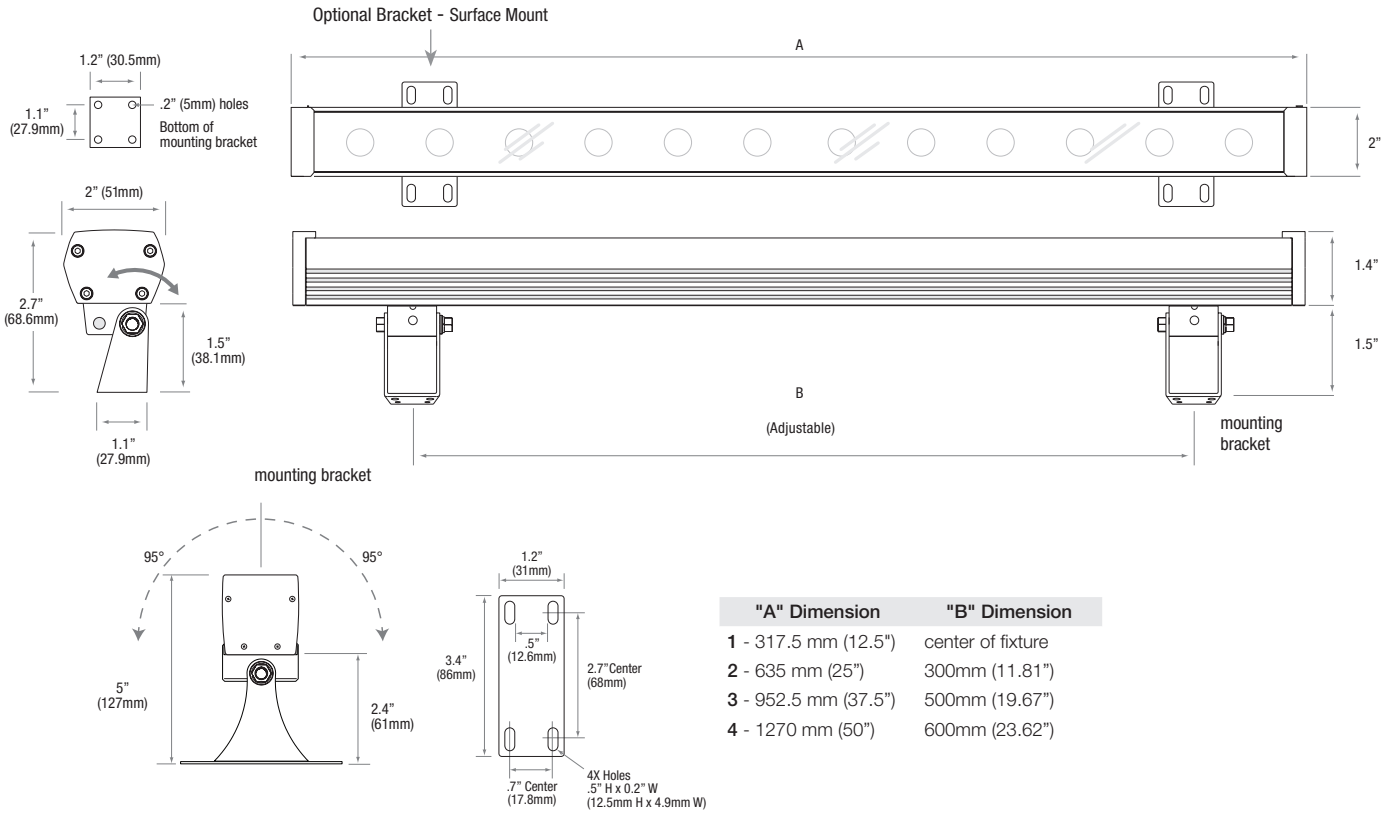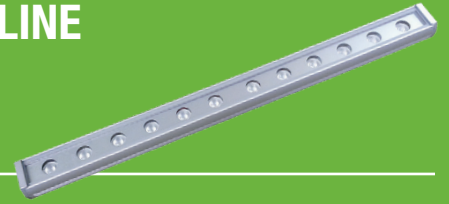


ACCESSORIES

BL - Black Louvre

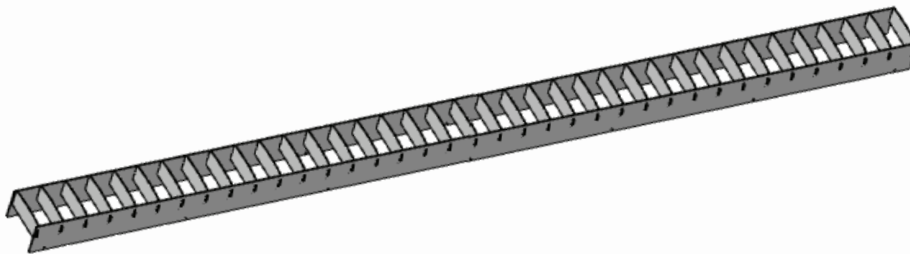

Due to continuous development and improvements, specifications are subject to change without notice. Solid State Luminaires reserves the right to change lab test details or specifications without notice. Product use certifies agreement to Solid State Luminaires terms and conditions.

Photometry

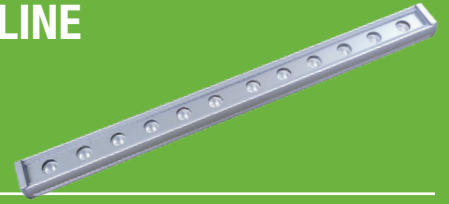

LENGTH	WATTAGE	DELIVERED LUMENS		
		3000K	3500K	4000K
305mm [12"]	12.5	570	602	750
610mm [24"]	25	1140	1204	1500
914mm [36"]	37.5	1710	1806	2550
1181mm [46.5"]	50	2280	2408	3000

Due to continuous development and improvements, specifications are subject to change without notice. Solid State Luminaires reserves the right to change lab test details or specifications without notice. Product use certifies agreement to Solid State Luminaires terms and conditions.