



**IMPORTANT**  
Allow proper spacing around luminaire to reduce heat and prolong LED life. Avoid total enclosure of CoveLine fixture.  
Allow air circulation around fixture during operation.





## Wet Cove Series Installation Guide

### Installation guide

5/32" x 3/4", 4 Pcs



Number of Mounting Brackets per fixture.  
1 foot/1, 2 foot/2, 4 foot/2, 6 foot/4  
(Using Adjustable Bracket 6 foot/3)

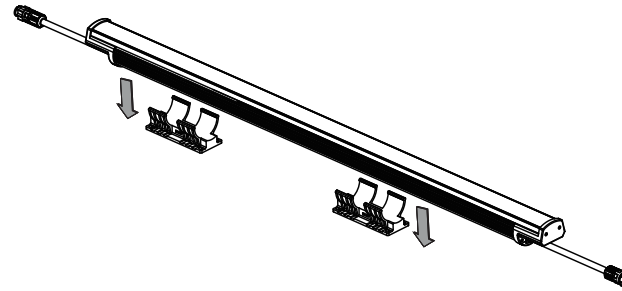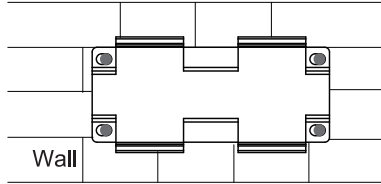

**Important!**

- Read all instruction before beginning installation.
- Shut off all power at the breaker box before installation and servicing.
- Install mounting brackets securely.

### Remarks

Maximum nn fixtures per daisy chain run including connectors.




nn = eCVLXWET - ( 1foot/80, 4foot/30, 6foot/20 )

nn = CVLWET - ( 1foot/60, 4foot/20, 6foot/12 )


nn = CVLXWET - ( 1foot/60, 4foot/20, 6foot/12 )

nn = eCVLXWET-250 - ( 1foot/120, 4foot/40, 6foot/20 )

- Connect the line input voltage from one end only.
- Use the end cap provided to cap off the run.
- See illustration. Connect all fixtures in each daisy chain before turning on.

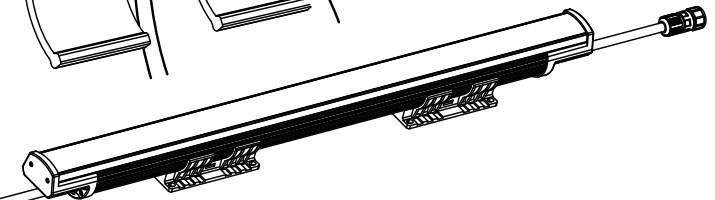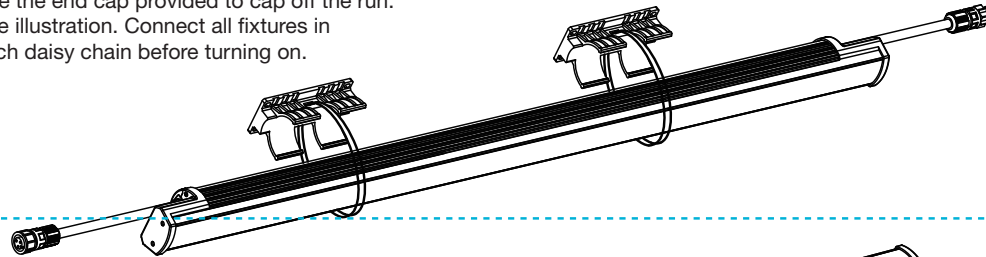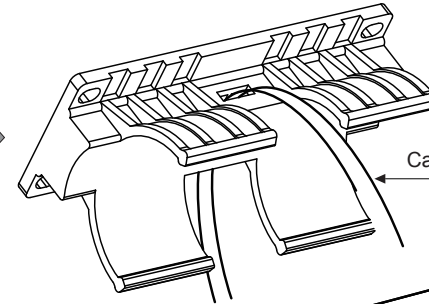

To Lead cable

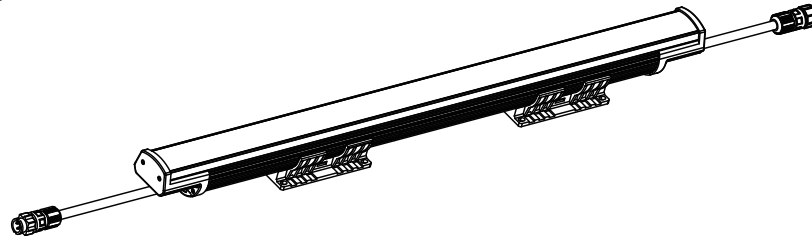

120–277V Universal Voltage

Maximum nn fixtures per daisy chain run including connectors.

nn = eCVLXWET - ( 1foot/80, 4foot/30, 6foot/20 )

nn = CVLWET - ( 1foot/60, 4foot/20, 6foot/12 )

nn = CVLXWET - ( 1foot/60, 4foot/20, 6foot/12 )

nn = eCVLXWET-250 - ( 1foot/120, 4foot/30, 6foot/20 )

