

## CYLINDERS (Y: Yoke Mount) INSTALLATION INSTRUCTIONS

CAUTION: BEFORE CONNECTING THE FIXTURE TO A POWER SUPPLY, MAKE SURE THE POWER IS SWITCHED OFF.

### GENERAL:

1. Fixture must be installed by licensed electrician.
2. All electrical connections must be in accordance with local codes, ordinances, or the National Electrical Code.
3. Before starting the installation, make sure all electricity has been turned off and electrical breaker has been locked out and tagged out.
4. To ensure the success of the installation, be sure to read these instructions and review the diagrams thoroughly before beginning.

**NOTE:** The important safeguards and instructions appearing in this manual are not meant to cover all possible conditions and situations that may occur.






### INSTALLATION INSTRUCTIONS:

- 1) Thread wiring through Yoke center hole, Canopy, and Mounting Bracket assembly.
- 2) Determine cord length needed by rotating the Cylinder to the desired angle on the yoke (no more than 90°). Then, trim excess cord and make wiring connections at the J-Box. Be sure to follow all NEC and local codes for wiring.
- 3) Use J-Box mounting screws to fasten the Mounting Bracket to the J-Box on the intended surface. It mounts to a standard sized octagonal J-Box (by others).
- 4) Open Cord Grip and fasten it around the cord with larger, finished face pointing downward just below the Yoke center hole. Snap Cord Grip shut and push it up into Yoke center hole until fully seated.
- 5) Attach the Yoke to the Canopy using the (2) supplied Yoke Hex Bolts.
- 6) Push the Canopy up onto the Mounting Bracket and tighten the Set Screws until fixture hangs freely. Coil any loose wiring into Canopy as needed.
- 7) To adjust fixture angle slightly, loosen Canopy Set Screws to set lateral direction and Yoke Arm Bolts to set the vertical beam direction.
- 8) Restore power to circuit, then test fixture.

**NOTE:** LED lamping is integral and NOT intended for general servicing.

**IMPORTANT:** All FC|SSL products can be cleaned with non-abrasive and chemical free agents. Use a soft cloth with mild detergent on exterior only.

### DETAILED ILLUSTRATION

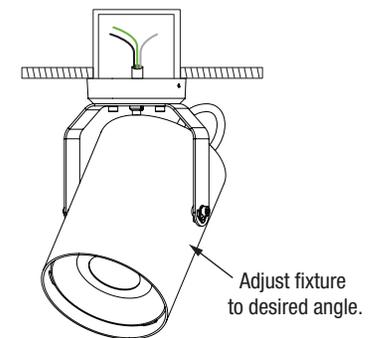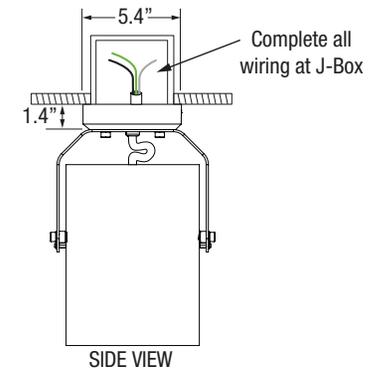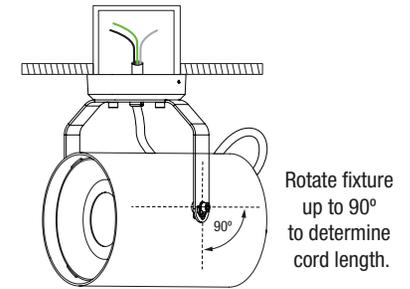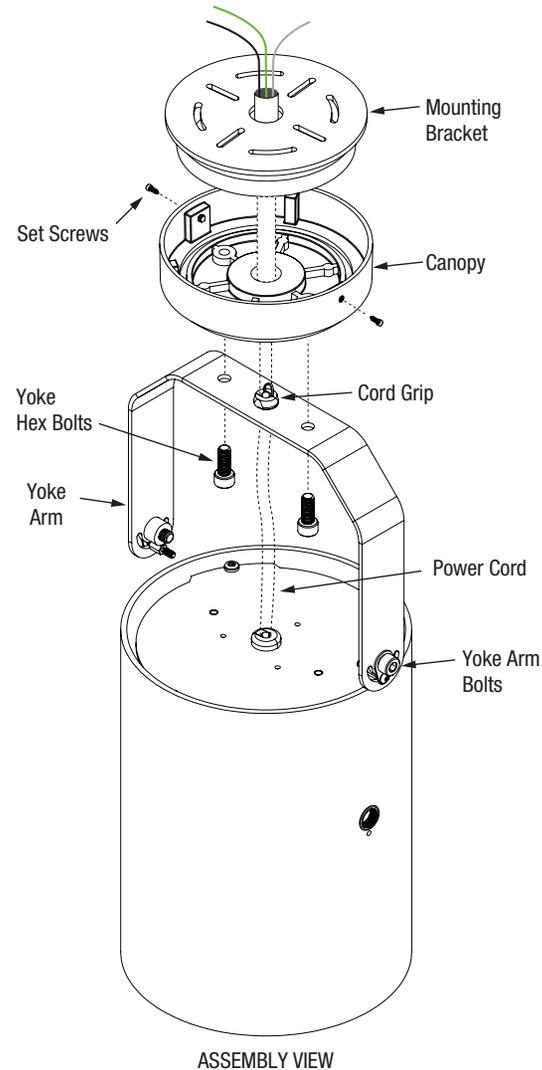

**SSL**  
solid state luminaires

t 800.900.1730 f 630.889.8106  
3609 Swenson Ave. St. Charles, IL 60174

SO-DH-32321