Date:	Approved:
Type:	
Luminaire:	
Project:	

SSC8 Eight-Inch Round Seamless Indoor Cylinder

Standard Drivers without Battery Backup

Made in USA with domestic & globally sourced components

FEATURES

- Up to 9000 lumens (4000K)
- Multiple dimming options
- No visible seams or fasteners
- Multiple housing colors
- 93 CRI with 2 SDCM

PERFORMANCE

Beam Spread: 15°, 25°, 40°, 50°, 72°, Wall Wash
CCT Options: 2700K, 3000K, 3500K, 4000K
CRI: 93 CRI
Consistency: 2 SDCM (Luminaire to Luminaire)
Lumens: 500 - 9000 lumens (typical)
Lumen Maintenance: L70 > 70,000 hours

PHYSICAL

Mounting: Aircraft cable, cord, slope pendant, surface, wall, yoke w/ twist-lock canopy or through drywall using optional mud ring adapter.
Housing: No visible seams or fasteners, marine grade, corrosion resistant, solid aluminum extrusion, high pressure die-cast aluminum components, colored baffle.
Finish: Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm minimum, 3,000 hour salt spray test (ASTM B117) AAMA 2603 specification.
Warranty: 5-Year limited warranty
Lens: IK05 impact compliant, clear anti-glare tempered glass. The Soft Field Lens option provides diffusion, reduces glare, and enhances visual comfort.
Ingress Protection: Dry or damp locations IP43 rated
Weight: 8-12 lbs (Depending on Length)
Operating Temperature: -22°F to 104°F (-30°C to 40°C)

ELECTRICAL

Voltage: Universal 120 - 277 VAC, 347 VAC optional
Power Supply: Integral Class II, electronic high-power factor >.90, THD < 20%, FCC Title 47 Part 15 Class A.
Power Consumption: Maximum 97W
Dimming: standard: 0-10V Dimming, 1%, **optional:** ET, LD
Standards:

- cETLus Listed, CE, NOM, and RoHS Compliant.
- Tested to UL 1598 and UL 8750 standards / UL-Class I / IES LM-79 / LM-80 / FCC Part 15.

PHYSICAL DIMENSIONS

Luminaire	Height (H)
SSC8-08	8" Height
SSC8-10	10" Height
SSC8-12	12" Height
SSC8-14	14" Height
SSC8-16	16" Height
SSC8-18	18" Height

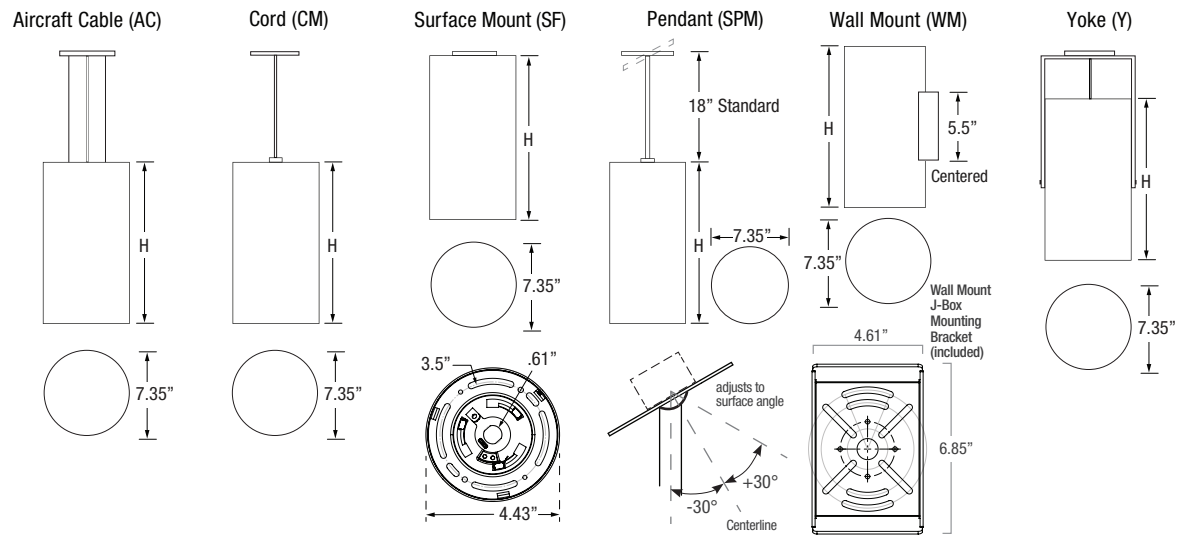

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires

3609 Swenson Ave • St. Charles, IL • 60174 | solidstateluminaires.com | 800.900.1730

solid state luminaires

Date:	Approved:
Type:	
Luminaire:	
Project:	

SSC8 Eight-Inch Round Seamless Indoor Cylinder

PRODUCT CODE

EXAMPLE: SSC8-8-SPM18-UNV-930-10L-BKI-15-ET

MODEL	HEIGHT	MOUNTING	SUSP. LENGTH	VOLTAGE	COLOR	LUMENS	FINISH	OPTIC	DIMMING	OPTIONS
SSC8	–	–		–	–	–	–	–	–	–

MODEL

SSC8

HEIGHT

8	8" Height
10	10" Height
12	12" Height
14	14" Height
16	16" Height
18	18" Height

MOUNTING

AC	Aircraft Cable
CM	Cord Mount (14" H Max)
SF	Surface Mount
SPM	Pendant Mount
WM	Wall Mount
Y	Yoke

AC/CM/SPM SUSPENSION LENGTH

Specify the optional suspension length in inches. (Top of luminaire to ceiling) (AC & CM 4"-120" Max, Field Adjustable) (SPM 18" Standard, 6"-120" Max; 61"-120" w/LD & ET Only and stem comes in 2 sections) *Consult factory & price guide for other lengths.

VOLTAGE

UNV	Universal 120 - 277 VAC
347V	347 VAC (Only SF, SPM, WM Mounts) (0-10V Dim Only) (25L-85L Only) (45L-75L Min 16" H, 80L-85L Min 18" H)

COLOR

927	(93CRI) 2700K
930	(93CRI) 3000K
935	(93CRI) 3500K
940	(93CRI) 4000K

Other CCT/CRI available upon request.

LUMENS typical

05L	500 lm
10L	1000 lm
15L	1500 lm
20L	2000 lm
25L	2500 lm
30L	3000 lm
35L	3500 lm
40L	4000 lm
45L	4500 lm
50L	5000 lm
55L	5500 lm (Minimum 10" H)
60L	6000 lm (Minimum 10" H)
65L	6500 lm (Minimum 10" H)
70L	7000 lm (Minimum 10" H)
75L	7500 lm (Minimum 14" H)
80L	8000 lm (Minimum 16" H)
85L	8500 lm (Minimum 16" H)
90L	9000 lm (Minimum 16" H)

FINISH

BKI	Black
BRI	Bronze
SLI	Silver
WHI	White
CCI	Custom Color

OPTIC typical

15	Spot (15°)
25	Narrow Flood (25°)
40	Mid Flood (40°)
50	Flood (50°)
72	Wide Flood (72°)

w/SOFT FIELD

15S	Spot
25S	Narrow Flood
40S	Mid Flood
50S	Flood
72S	Wide Flood
WW	Wall Wash (25° Optic Only)

DIMMING

ET	ELV or TRIAC Driver (Max 45L, 120V Phase Dimming Only with UNV Driver)
LD	0-10V Dimming, 1% (standard)

OPTIONS

CO	Surface Mount Conduit Adapter
MRA	Mud Ring Adapter
BRB	Bronze Baffle Finish (Black finish standard)
SLB	Silver Baffle Finish (Black finish standard)
WHB	White Baffle Finish (Black finish standard)

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires

3609 Swenson Ave • St. Charles, IL • 60174 | solidstateluminaires.com | 800.900.1730

SSC8 Eight-Inch Round Seamless Indoor Cylinder

LUMENS / WATTAGE typical

Model	Watts	940
SSC8	6.4 W	500 lm
	9 W	1000 lm
	13 W	1500 lm
	18 W	2000 lm
	23 W	2500 lm
	28 W	3000 lm
	33 W	3500 lm
	37 W	4000 lm
	44 W	4500 lm
	49 W	5000 lm
	55 W	5500 lm
	59 W	6000 lm
	66 W	6500 lm
	71 W	7000 lm
	77 W	7500 lm
	86 W	8000 lm
	92 W	8500 lm
	97 W	9000 lm

IES Multiplier	
Color	Multiplier
927	0.92
930	0.95
935	0.98
940	1.00

**83CRI≤1.15 Consult factory.*

TRIAC & ELV Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Glyder GLV-600
	Diva DVLV-600P
	Diva DV-600P
	Diva DVELV-600P(303)
	Maestro MALV-600
	Nova T NT-1000
	Nova T NTELV-600
	Skylark SLV-600P
	RadioRA2-10ND
Leviton	SureSlide 6633
	Illumatech IPE04

0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Diva DVSTV-XX
	Diva DVSTV-453PH-WH1
Leviton	Illumatech 010-IP710-DLZ

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires

SSC8 Eight-Inch Round Seamless Indoor Cylinder

PHOTOMETRICS

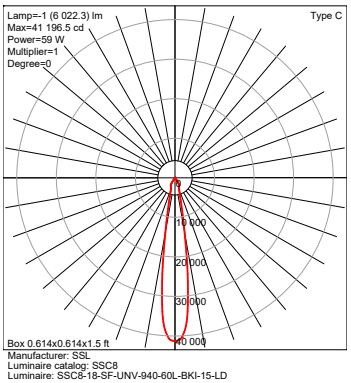

Manufacturer: SSL
Luminaire catalog: SSC8
Luminaire: SSC8-18-SF-UNV-940-60L-BKI-15-LD

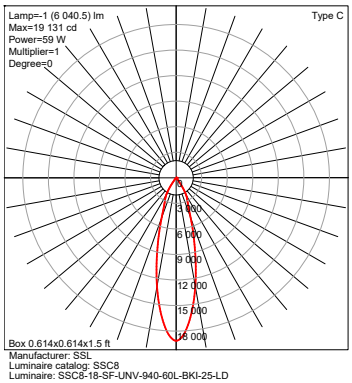

Manufacturer: SSL
Luminaire catalog: SSC8
Luminaire: SSC8-18-SF-UNV-940-60L-BKI-25-LD

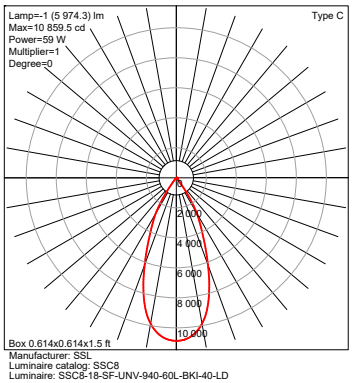

Manufacturer: SSL
Luminaire catalog: SSC8
Luminaire: SSC8-18-SF-UNV-940-60L-BKI-40-LD

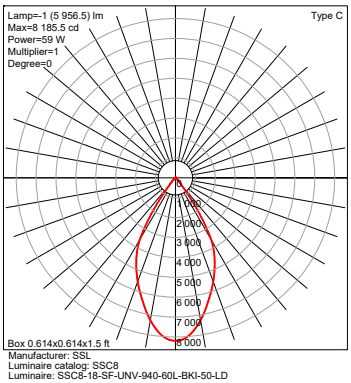

Manufacturer: SSL
Luminaire catalog: SSC8
Luminaire: SSC8-18-SF-UNV-940-60L-BKI-50-LD

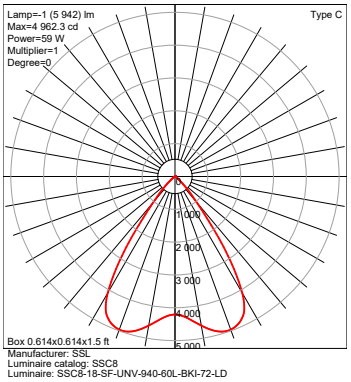

Manufacturer: SSL
Luminaire catalog: SSC8
Luminaire: SSC8-18-SF-UNV-940-60L-BKI-72-LD

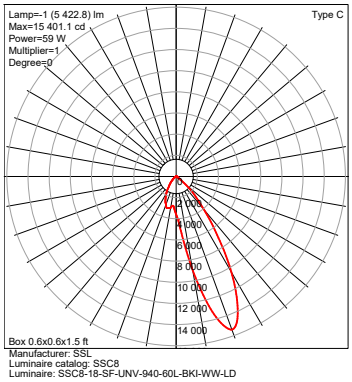

Manufacturer: SSL
Luminaire catalog: SSC8
Luminaire: SSC8-18-SF-UNV-940-60L-BKI-WW-LD

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires

SSC8 Eight-Inch Round Seamless Indoor Cylinder

CO Option

Surface Mount Conduit Adapter

For wall or ceiling installation.
NOT for use in uplight pier mount.

JUNCTION BOX



Ø 1/2"
Trade Size
Qty. 4 (Sides)

SURFACE MOUNT CONDUIT ADAPTER
(for SPM Cylinders)

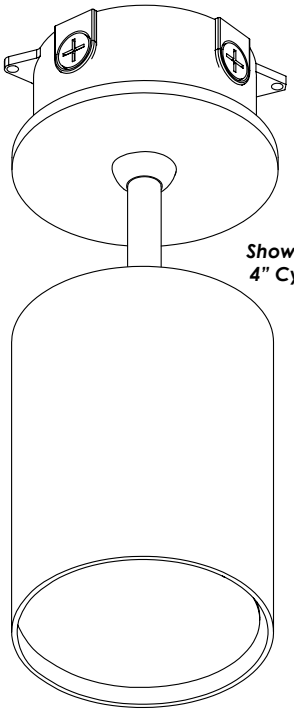

Show with a 4" Cylinder

TOP VIEW JUNCTION BOX
(Hole Center Top)



Trade Size
(Threaded holes for 1/2" threaded conduit, with plugs)

For wall or ceiling installation.
NOT for use in uplight pier mount.

JUNCTION BOX



Ø 1/2" Trade Size
Qty. 4 (Sides)

SURFACE MOUNT CONDUIT ADAPTER
(for AC, CM, SF Cylinders)

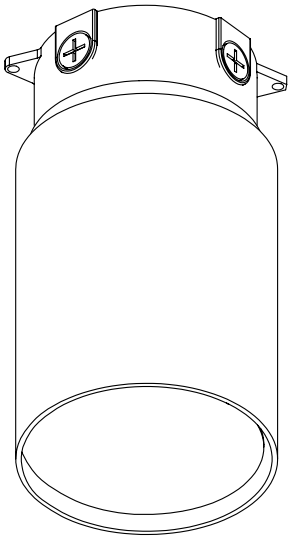

Show with a 4" Cylinder

TOP VIEW JUNCTION BOX
(Hole Center Top)



Trade Size
(Threaded holes for 1/2" threaded conduit, with plugs)

Surface Mount Conduit Adapter can be added to any of the AC, CM, SF and SPM Mounts

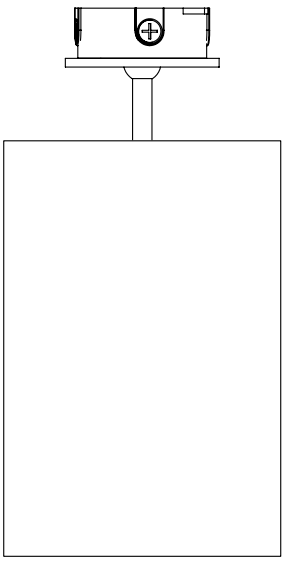

8" Cylinder Slope Pendant w/Surface Mount Conduit Adapter

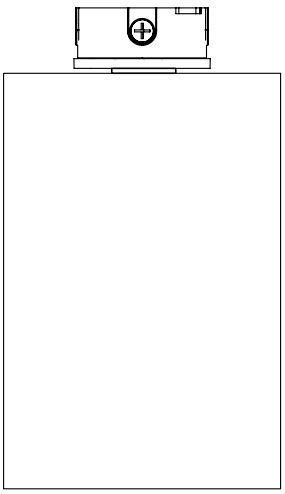

8" Cylinder Surface Mount w/Conduit Adapter

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires

SSC8 Eight-Inch Round Seamless Indoor Cylinder

MRA Option

Mud Ring Adapter

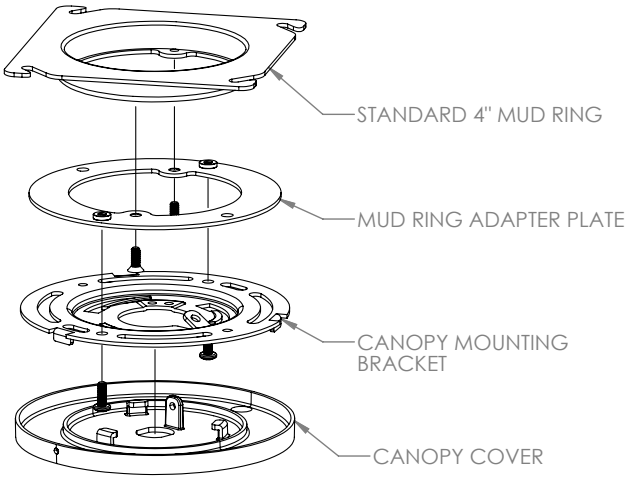

Due to continuous development and improvements, specifications are subject to change without notice.
Product use certifies agreement to Solid State Luminaires terms and conditions.

US Commercial Lighting Manufacturer Since 1982

© Solid State Luminaires